

Technical Information

HYDRO OR VISUAL? - CAN'T DECIDE *Guidance on providing the correct type of inspection*

T014

When a cylinder comes in to a centre and it has passed its due date for a visual, many centres are telling their customers that it MUST have a hydro. This is not necessarily correct.

Some years ago, IDEST spoke with the incumbent Head of HSE about this situation. Unfortunately, he is no longer with us but he did give us some words of wisdom that IDEST passes on today.


From the date of any Periodic Inspection and Test (PIAT), or Hydro, the Standards that we work to say a cylinder has to be re-hydro tested at the five-year anniversary of the previous test. The Standards also say that the cylinder should undergo a Periodic Inspection (PI) after two and a half years, to check it is fit to be used until the next PIAT.

If a cylinder misses a PI, or visual inspection, as most people know it, then common sense should prevail. If the cylinder is within a year to six months of the next Hydro then bring the hydro forward. When this situation happens, the five-year interval will commence from the date of the new hydro rather than the original one.

If the over-run of the PI is **up to eighteen months** from the date of the last hydro test, then a PI can quite legitimately be carried out. If the internal inspection shows potential problems then by all means a hydro test should be carried out.

Please ensure your centre uses this policy

Time frame:

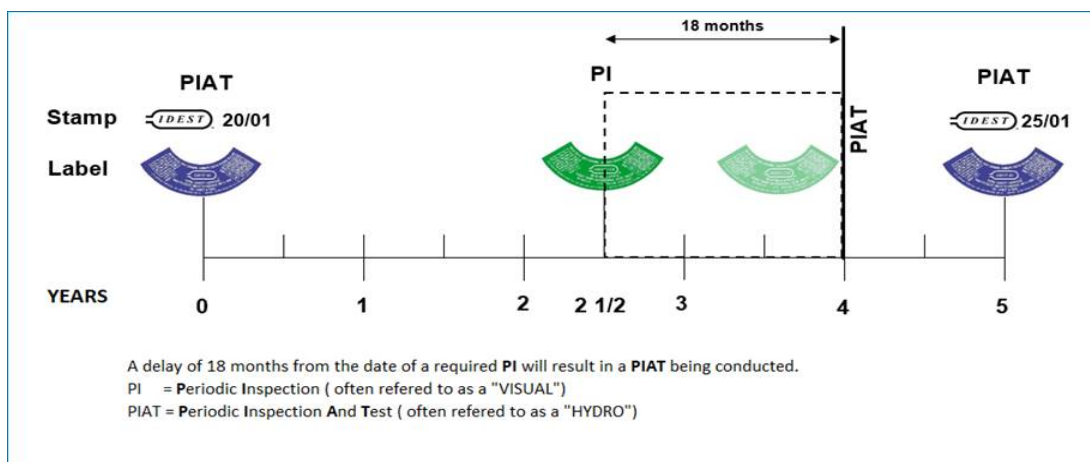

Technical Information Sheet